

National Steel Rule

PERFormaX SRP/RRP Rotary & Flat Perforating Rule and Wheels

Taking the mystery out of shelf ready/retail ready packaging

Effective perforating for SRP/RRP should accomplish the following 6 major goals:

- Create packaging that consistently stands up to transportation and handling stress
- Make packaging that is easy to open and to merchandise
- When torn, the resultant edges should look and feel significantly superior to conventional perforations
- Have strong teeth, at a consistently even height
- Make it simple to choose the right perforation
- Be reasonably priced and readily available



Represented here is the 945 pattern

The 5 patterns of the New PERFormaX family:

- **945** - 9 TPI x .050" (1.3 mm) Space **45% Hold Strength**
- **955** - 9 TPI x .060" (1.5 mm) Space **55% Hold Strength**
- **860** - 8 TPI x .075" (1.9 mm) Space **60% Hold Strength**
- **763** - 7 TPI x .090" (2.3 mm) Space **63% Hold Strength**
- **568** - 5 TPI x .135" (3.4 mm) Space **68% Hold Strength**


Most commonly stocked and ordered in Straight Notched Form

PERFormaX is also available in three Flatbed non-serrated patterns (.937" x 3 point):

- **932** - 9 TPI x .035" (0.9 mm) Space **32% Hold Strength**
- **940** - 9 TPI x .045" (1.1 mm) Space **40% Hold Strength**
- **948** - 9 TPI x .053" (1.3 mm) Space **48% Hold strength**

PERFormaX SRP/RRP Rotary Rule **Wheels**

Available in Hand-held or Automatic model

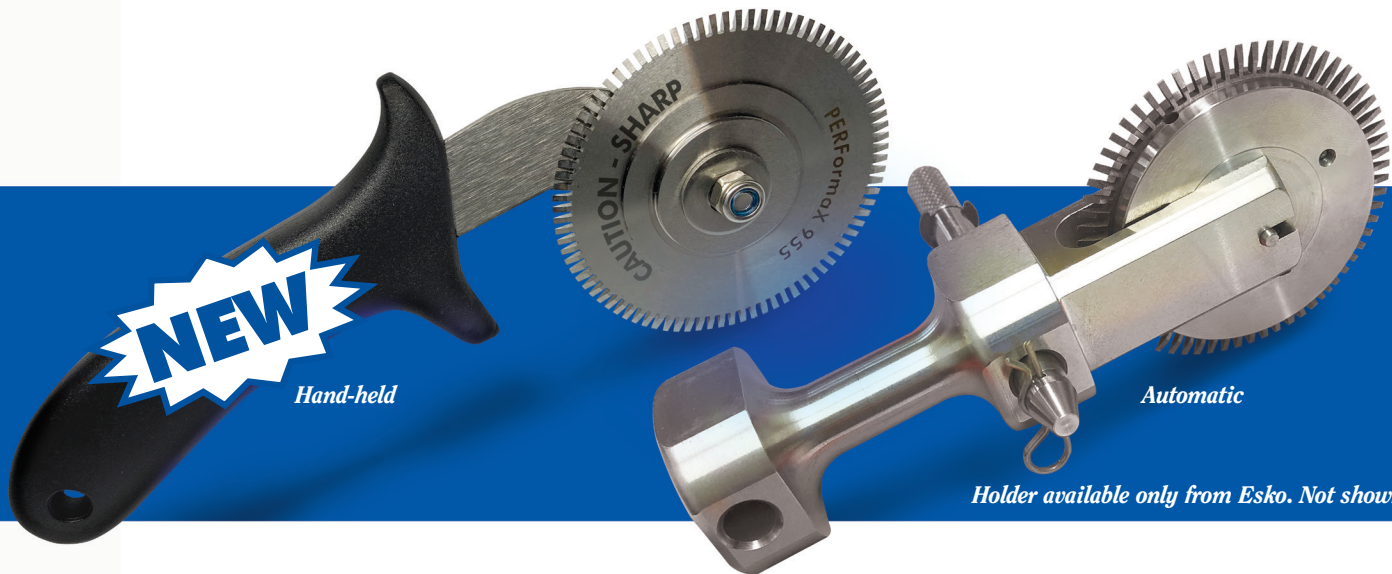

NEW

Hand-held

Automatic

Holder available only from Esko. Not shown to scale.

Rotary PERFormaX patterns available in 60 mm (2.36") Wheels to fit Kongsberg sample tables & NEW 3" (76.2 mm) Hand-held model NOW AVAILABLE!

Contact us for further information.

PH 800-922-0885

FAX 800-447-3512

www.steelrule.com